

5 Port Pilot Operated Solenoid Valve Rubber Seal, Non Plug-in Series *VFR2000*



Non plug-in type

How to Order

Piping (P, A, B, EA, EB port)

Nil	Side ported
-----	-------------

* Option

Port size (P, A, B port)

Nil	Without sub-plate
01	1/8
02	1/4

EA, EB port: 1/8


Non plug-in



30 - VFR2 1 10 [] - 1 D [] [] - [] 02 []

Conforming to CSA standard

Symbol

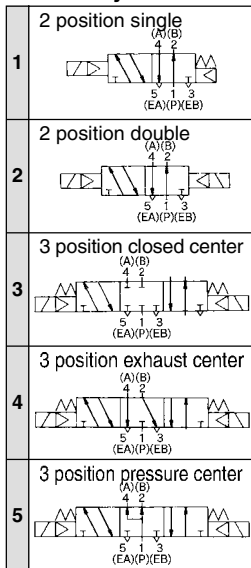

Pilot type

Nil	Internal pilot
R *	External pilot

* Option (External pilot is available only on sub-plate type.)

Coil rated voltage

1	100 VAC, 50/60 Hz
2	200 VAC, 50/60 Hz
3 *	110 to 120 VAC, 50/60 Hz
4 *	220 VAC, 50/60 Hz
5	24 VDC
6 *	12 VDC
7 *	240 VAC, 50/60 Hz

* Option

Thread type

Nil	Rc
N	NPT
T	NPTF
F	G

Pilot valve manual override

Nil: Non-locking push type B*: Locking type B (Tool required)



A*: Non-locking push type A (Extended) C*: Locking type C (Lever)




* Option

Option

Nil	None
Z	With light/surge voltage suppressor

Electrical entry

D: DIN terminal



Refer to the standard product for product specifications, dimensions and model selection procedures.