

# 2-Color Indication Type with Diagnostic Output Solid State Auto Switch: Band Mounting Style D-H7NF




## Grommet

Since the diagnostic output signal can be detected in an unsteady detecting area, the difference of detecting position can be confirmed by the side of PLC (Programmable Logic Controller).



## Auto Switch Internal Circuit

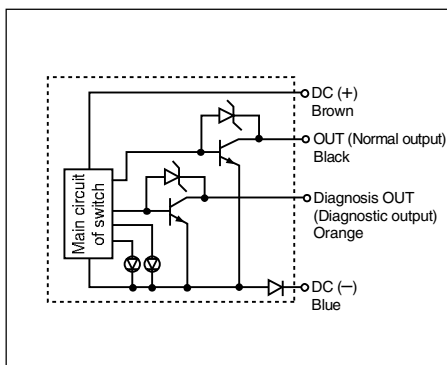

## Auto Switch Specifications

PLC: Programmable Logic Controller

D-H7NF (With indicator light)	
Auto switch model	D-H7NF
Wiring type	4-wire
Output type	NPN
Diagnostic output	Normal operation
Applicable load	IC circuit, Relay, PLC
Power voltage	5, 12, 24 VDC (4.5 to 28 VDC)
Current consumption	10 mA or less
Load voltage	28 VDC or less
Load current	50 mA or less at the total amount of normal output and diagnostic output
Internal voltage drop	1.5 V or less (0.8 V or less at each output 5 mA)
Current leakage	100 $\mu$ A or less at 24 VDC
Indicator light	Operating range ..... Red LED illuminates. Proper operating range ..... Green LED illuminates.
Standard	CE marking

• Lead wires — Oilproof heavy-duty vinyl cord,  $\phi$ 3.4, 0.2 mm<sup>2</sup>, 4 cores (Brown, Black, Orange, Blue), 0.5 m

Note 1) Refer to page 1272 for solid state auto switch common specifications.

Note 2) Refer to page 1272 for lead wire lengths.


## Mass

(g)

Auto switch model		D-H7NF
Lead wire length (m)	0.5	13
	3	56
	5	90

## Diagnostic Output Operation

The diagnostic output signal is output within unsteady detecting area (where indicator light is Red), and the diagnostic output becomes OFF when the detecting position remains within the proper operating range (where indicator is Green). When the detecting position is not adjusted, the diagnostic output becomes ON.

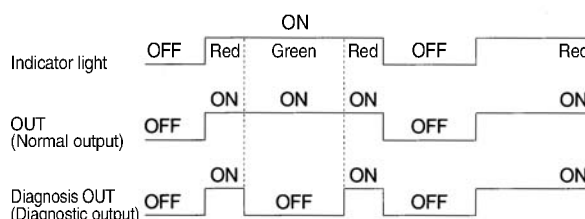

## Dimensions

(mm)

